


MODEL	COLOR	SPRING				DIMENSION											
		RATED LOAD		RATED DEFL.		A		B		C		D		E		F	
		LB	KG	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
SRH-1-35 BBT	BLUE	35	16	1.61	41	3.69	94	7.38	187	2.25	57	0.25	6	3.19	81	1.61	41
SRH-1-70 BBT	GREEN	70	32	1.55	39	3.69	94	7.38	187	2.25	57	0.25	6	3.19	81	1.61	41
SRH-1-125 BBT	GRAY	125	57	1.56	40	3.69	94	7.38	187	2.25	57	0.25	6	3.19	81	1.61	41
SRH-1-245 BBT	BROWN	245	111	1.52	39	3.69	94	7.38	187	2.25	57	0.25	6	3.19	81	1.61	41
SRH-1-370 BBT	ORANGE	370	168	1.29	33	3.69	94	7.38	187	2.25	57	0.25	6	3.19	81	1.61	41



SRHBBT-1 ISOLATION HANGERS HAVE A MINIMUM K_x/K_y OF 1.2
 SRHBBT-1 ISOLATION HANGERS HAVE A TYPICAL OVERLOAD CAPACITY OF 50%
 SRHBBT-1 SPRING ELEMENTS ARE SAFE FOR SOLID LOADING
 SRHBBT-1 HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
 SRHBBT-1 HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING
 SRHBBT-1 SPRING AND BRACKET ARE POWDER COATED. ALL OTHER STEEL COMPONENTS ARE BRIGHT ZINC PLATED.

D - EYEBOLT SIZE

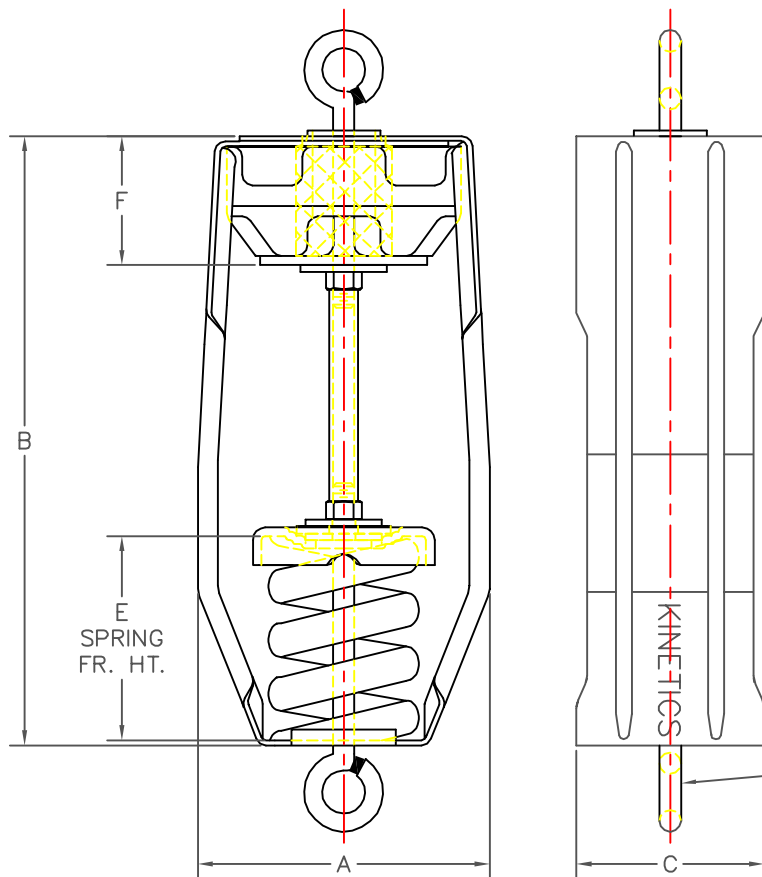

TITLE

SRH-1-35/370 BBT

LAST DATE
REVISED
03/25/02

REVISED BY
BB

DRAWING NO.
SS-20020360

SS-2002