

KINETICS™

Inertia Base Frame Model CIB-H

Features

- Welded structural steel perimeter frame
- Thicknesses as required:
Standard members are 6 in (152 mm), 8 in (230 mm), 10 in (254 mm) and 12 in (305 mm).
Other members up to 36 in (914 mm) are available
- Base sizes as required
- Height saving welded-on steel isolator brackets
- Welded-in reinforcing bars
- Pre-located anchor bolts (*optional*)
- Optional corrosion-resistant finish

Description


Model CIB-H inertia base frames, when filled with concrete and supported by proper Kinetics noise and vibration isolators, provide outstanding equipment isolation, support, anchorage, and vibration amplitude control.

Model CIB-H inertia base frames incorporate welded structural steel channel perimeter frames of sizes and depths specified. Also included are steel isolator brackets, welded-in steel reinforcing rods, and equipment anchor bolts, if required.

Standard Model CIB-H inertia base frames are available in thicknesses of 6 in (152 mm), 8 in (203 mm), 10 in (254 mm) and 12 in (305 mm), and include height saving isolator mounting brackets for use with high deflection springs.

Standard steel reinforcing rods are 1/2 in (13 mm) diameter and located on 8 in (203 mm) centers each way. Pre-located equipment anchor bolts (*optional*) are fixed into proper location.

Model CIB-H inertia base frames minimize installation time and job site labor by arriving at the job site completely assembled and ready to fill with concrete.

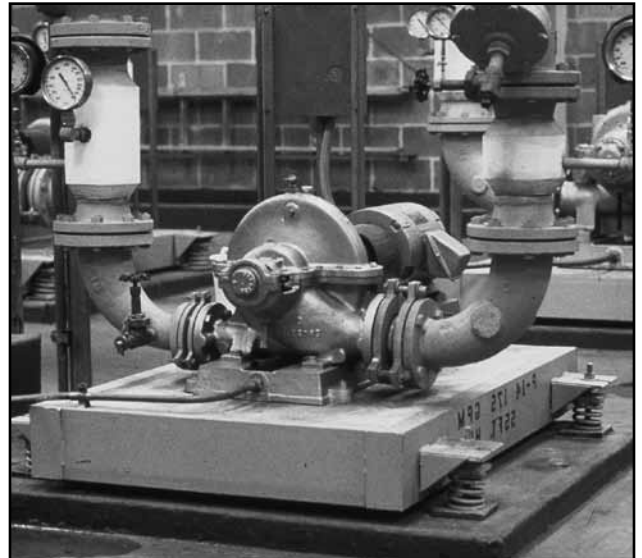


Application

Kinetics Model CIB-H inertia base frames are specifically designed and engineered to receive poured concrete, and support mechanical equipment requiring a reinforced concrete inertia base.

Inertia bases are used to support mechanical equipment, reduce vibration amplitude, provide for attachment of vibration isolators, prevent differential movement between driving and driven members, reduce rocking by lowering equipment center of gravity, reduce motion of equipment during start-up and shut-down, act to reduce reaction movement due to operating loads on equipment, and act as a partial noise barrier.

Typically, Kinetics Model CIB-H inertia base frames are used with poured concrete, and supported by Kinetics noise and vibration isolators for reciprocating air and refrigeration compressors, chillers, heat pumps, close-coupled pumps, base-mounted pumps, centrifugal fans, internal combustion engines and similar types of equipment.

CIB-H inertia base frames are specified for projects requiring base sizes not covered by CIB-L inertia base frames.

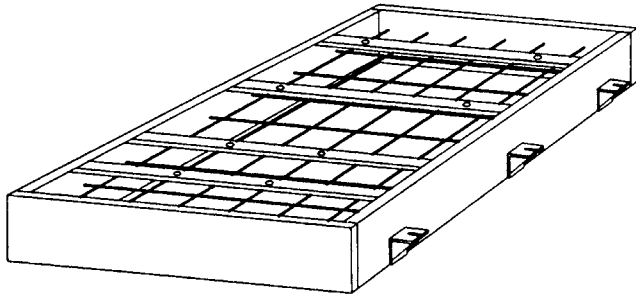

Specifications

Isolation bases shall be constructed of concrete cast into fabricated inertia base frames, the steel members of which are designed and supplied by the isolator manufacturer. The concrete shall be poured into a welded structural steel frame, incorporating prelocated equipment anchor bolts (*optional*), 1/2-in (13 mm) diameter reinforcing bars on nominal 8 in (203 mm) centers each way, and external isolator mounting brackets to reduce the mounting height of the equipment. The thickness of the base shall be a minimum of 8% of the longest span between isolators, at least 6 in (152 mm), or as indicated on the drawings. Where inertia bases are used to mount pumps, the bases shall be sized to support piping elbows.

Concrete inertia bases shall be Model CIB-H, as manufactured by Kinetics Noise Control, Inc.



United States

6300 Irelan Place
P.O. Box 655
Dublin, Ohio 43017
Phone: 614-889-0480
Fax: 614-889-0540

Canada

3570 Nashua Drive
Mississauga, Ontario
L4V 1L2
Phone: 905-670-4922
Fax: 905-670-1698

www.kineticsnoise.com
sales@kineticsnoise.com

Kinetics Noise Control, Inc. is continually upgrading the quality of our products. We reserve the right to make changes to this and all products without notice.