


KINETICS™

Structural Frame Bases Model SFB

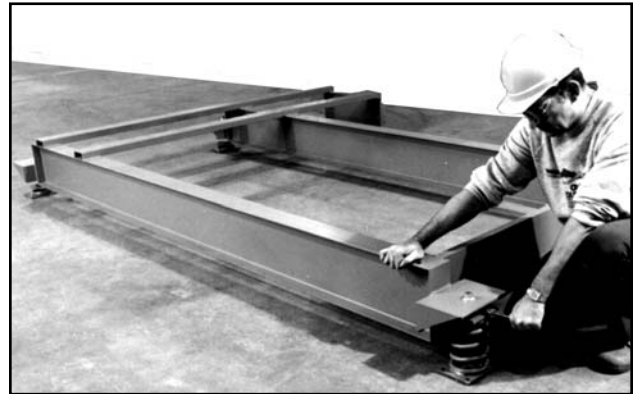

Description

Kinetics Model SFB Welded Structural Frame Bases are individually engineered to support and add rigidity to a specific piece of mechanical equipment and to allow the use of selected vibration isolators. The bases provide a rigid frame to reduce motion on start-up and maintain belt or drive alignment. The bases are fabricated with channels, angles, or WF beams, and are complete with outboard height-saving isolator brackets and prelocated equipment anchor bolts. Main steel members have section depths of 3" to 12" (76 mm to 305 mm), designed to be a minimum of 10% of the longest span between isolators.

Features

- Welded structural frame base
- Standard section depths 3" through 12" (75 mm through 305 mm)
- Frame members include WF beams, Channels, Angles, and I-beams
- Frame sizes and shapes as required
- Height-saving brackets
- Prelocated anchor bolt holes

Application

Kinetics Model SFB Structural Frame Bases are specifically designed and engineered to support mechanical equipment requiring a supplemental mounting frame.

Structural frame bases are used to support mechanical equipment and provide rigid platforms for attachment of vibration isolators, without allowing excessive differential movement between driving and driven members. The bases provide a means by which the equipment can be stabilized and motion reduced by lowering the equipment center of gravity.

Typical uses of Kinetics Model SFB structural frame bases, with Kinetics vibration isolators, include support and isolation of reciprocating chillers, close coupled pumps, vent sets, packaged air handling units, centrifugal fans, evaporative condensers, and similar types of equipment.

Specifications

Bases shall be fabricated from structural beam sections with welded isolator brackets and prelocated anchor bolt holes, and shall be designed and supplied by the isolation materials manufacturer.


Section depth of each member shall be greater than 10% of the longest span between supporting isolators, or as shown on the drawings or indicated in the project documents.

Isolator support brackets shall be welded to the structural beams as required to obtain the lowest mounting height for the supported equipment.

Lateral cross members shall be added to form a structurally integral, welded frame to provide a rigid, distortion-free frame to support and anchor separate equipment components or driving and driven members.

Structural frame bases shall be Model SFB, as manufactured by Kinetics Noise Control, Inc.

Standard Structural Members		Flange Width		Weight per Foot (m)		Length/Width
Angle - 2" x 3"	(51 mm x 76 mm)	2"	(51 mm)	4.1#/ft.	(5.8 kg/m)	As Required
Angle - 3" x 4"	(76 mm x 102 mm)	3"	(76 mm)	5.8#/ft.	(8.2 kg/m)	
Angle - 3 1/2" x 6"	(89 mm x 152 mm)	3-1/2"	(89 mm)	7.9#/ft.	(11.2 kg/m)	
Channel - 4"	(102 mm)	1-5/8"	(41 mm)	5.4#/ft.	(7.6 kg/m)	As Required
Channel - 6"	(152 mm)	1-15/16"	(49 mm)	8.2#/ft.	(11.6 kg/m)	
Channel - 8"	(203 mm)	1-7/8"	(48 mm)	8.5#/ft.	(12.0 kg/m)	
WF Beam - 6"	(152 mm)	4"	(102 mm)	8.5#/ft.	(12.0 kg/m)	As Required
WF Beam - 8"	(203 mm)	4"	(102 mm)	10.0#/ft.	(14.1 kg/m)	
WF Beam - 10"	(254 mm)	4"	(102 mm)	11.5#/ft.	(16.3 kg/m)	
WF Beam - 12"	(305 mm)	4"	(102 mm)	14.0#/ft.	(19.8 kg/m)	

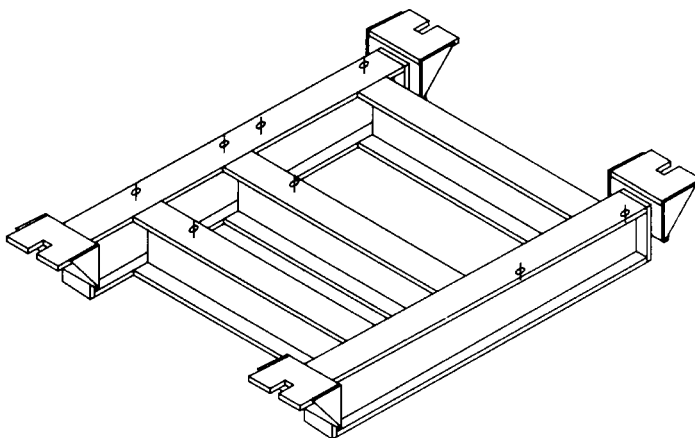

United States

6300 Irelan Place
P.O. Box 655
Dublin, Ohio 43017
Phone: 614-889-0480
Fax: 614-889-0540

Canada

1720 Meyerside Drive
Mississauga, Ontario
L5T 1A3
Phone: 905-670-4922
Fax: 905-670-1698

www.kineticsnoise.com
sales@kineticsnoise.com

Kinetics Noise Control, Inc. is continually upgrading the quality of our products. We reserve the right to make changes to this and all products without notice.