



**KINETICS™**

## Noise Control Curtains Model KNC

Kinetics model KNC Noise Control Curtains are modular, reinforced limp-mass and quilted fiberglass composites designed to block noise or to act as a movable barrier between noisy and quiet areas. Kinetics Noise Control Curtain Systems incorporate a self-supporting track which allows the curtain to open for access at virtually any point along the barrier or enclosure.

Kinetics curtains are available from 0.50 to 2.50 PSF (2.5 to 12.5 kg/m<sup>2</sup>) surface weight. The systems are typically used for applications where accessibility, toughness, oil and chemical resistance, and an attractive appearance are required. A curtain system can yield noise reduction of 12-15 dBA.

Each curtain panel is furnished with Velcro®, self-adhering, nylon closures along the entire length of each edge and heavy-duty grommets along the top.

Kinetics models KNC-50C and 100C Clearview Curtains or windows are available. Models KNC-50RB and 100RB are reinforced vinyl barriers. Models KNC-50RBQ and 100RBQ have an aluminum-faced, quilted fiberglass absorber towards the noise source to block sound from escaping and to absorb sound that is reflected. Models KNC-50BQQ and 100BQQ are vinyl barriers completely encased in quilted

fiberglass absorber and are designed where additional absorption and Class A flame and smoke test requirements are needed.

Channel support systems for curtains are standard 1.625" x 1.625" (41 mm x 41 mm), 12-gauge rolled channel that can be floor-mounted or suspended. Curtain panels can be attached to the support system by trolley assemblies for movable curtains or fixed to the support system by mechanical fasteners for non-movable curtains. Standard BQQ curtain panels are 48" (1219 mm) wide and standard RBQ curtain panels are 54" (1372 mm) wide. BQQ and RBQ are available in lengths of up to 20' (6096 mm). Kinetics model KSD strip doors and clear vinyl windows are easily incorporated into model KNC curtain systems for visual and personnel access. We are also able to design structured steel support frames when needed.

### **Application**

Model KNC Curtain Systems can be used as a partial or complete enclosure around noise sources. Curtains are especially useful for enclosures around industrial equipment since the enclosure is more versatile and economical than a rigid enclosure. Typical applications include enclosures around punch presses, compressors, pumps, granulators, blowers, and generators, etc.



### Absorption Characteristics

Product	Octave Band Frequency (Hz)						
	125	250	500	1000	2000	4000	NRC
Q - 1" Quilt	0.12	0.47	0.85	0.84	0.64	0.62	0.70
Q2 - 2" Quilt	0.08	0.33	0.79	1.02	1.04	1.02	0.80
Q4 - 4" Quilt	0.30	0.83	1.16	1.18	1.10	1.07	1.10

### Sound Transmission Loss (dB)

ASTM E90-90

Product	Weight		Frequency (Hz)						STC*
	lb/ft <sup>2</sup>	kg/m <sup>2</sup>	125	250	500	1000	2000	4000	
KNC-50RB	0.5	2.44	12	13	16	21	27	32	21
KNC-100RB	1.0	4.89	13	17	21	28	33	40	26
KNC-50RBQ	0.7	3.4	6	12	17	27	38	46	23
KNC-100RBQ	1.3	6.4	10	16	22	30	42	49	27
KNC-50BQQ	1.0	4.9	7	12	18	31	46	50	24
KNC-100BQQ	1.5	7.4	11	16	28	41	50	53	29
KNC-200BQQ	2.5	12.5	16	20	30	40	51	55	33
KNC-50C	0.5	2.44	13	13	17	22	27	31	20
KNC-100C	1.0	4.89	19	19	23	28	33	37	26

\*Per ASTM designation E413-87

### Specifications

Curtain systems shall consist of panels which meet the specifications and physical properties of the curtain material above. Each panel shall be furnished with Velcro® self-adhering nylon closures along the entire length of each edge. Support points at the top of each panel shall be reinforced at grommet locations not more than 12" (305 mm) apart. Support systems for curtains shall be 1.625" x 1.625" (41 mm x 41 mm) 12-gauge formed channel with associated hardware as designed by Kinetics Noise Control. Entire system shall be model KNC as manufactured by Kinetics Noise Control, Inc.


### Product Descriptions

- KNC-50RB:** Reinforced barrier
- KNC-100RB:** Reinforced barrier
- KNC-50RBQ:** Reinforced barrier with quilting on one (1) side
- KNC-100RBQ:** Reinforced barrier with quilting on one (1) side
- KNC-50BQQ:** Barrier quilting on both sides
- KNC-100BQQ:** Barrier quilting on both sides
- KNC-200BQQ:** Barrier quilting on both sides
- KNC-50C:** Clearview barrier
- KNC-100C:** Clearview barrier

### KEY

- RB (Reinforced Barrier);
- B (Non-Reinforced Barrier) ;
- Q (Quilt)

Silicone Faced Quilt is also available

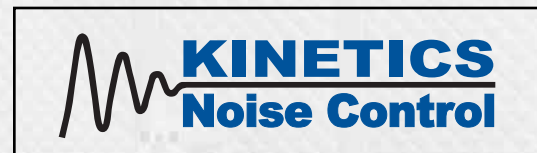

#### United States

6300 Irelan Place  
P.O. Box 655  
Dublin, Ohio 43017  
Phone: 614-889-0480  
Fax: 614-889-0540

#### Canada

3570 Nashua Drive  
Mississauga, Ontario  
L4V 1L2  
Phone: 905-670-4922  
Fax: 905-670-1698

[www.kineticsnoise.com](http://www.kineticsnoise.com)  
[sales@kineticsnoise.com](mailto:sales@kineticsnoise.com)

Kinetics Noise Control, Inc. is continually upgrading the quality of our products. We reserve the right to make changes to this and all products without notice.