






TURN OFF POWER  
SUPPLY TO THE  
ELECTRICAL OUTLET

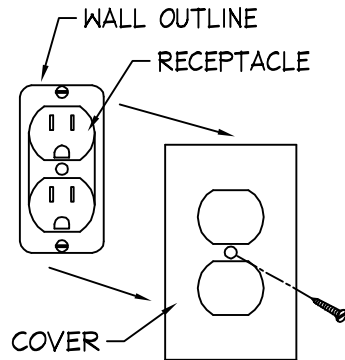

REMOVE OUTLET  
COVER PLATE AND  
PULL PLUG AWAY  
FROM WALL




INSTALL OUTLET  
EXTENSION TO  
WALL OUTLET PER  
MANUFACTURER'S  
INSTRUCTIONS

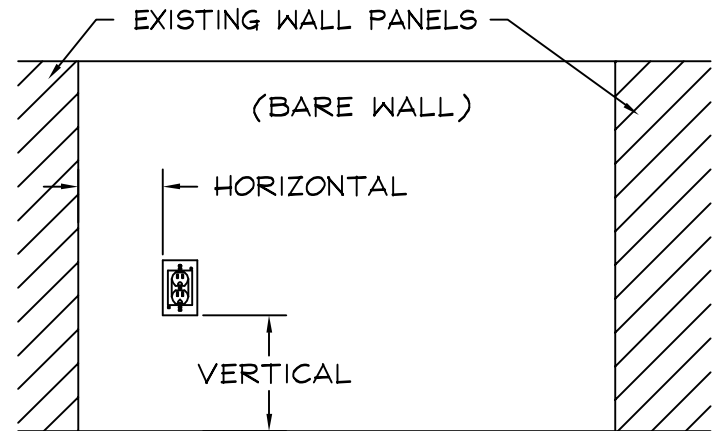


MEASURE LOCATION OF EXTENSION ON THE  
WALL AND TRANSFER THESE DIMENSIONS  
TO THE BACK OF THE WALL PANEL


BACK OF PANEL

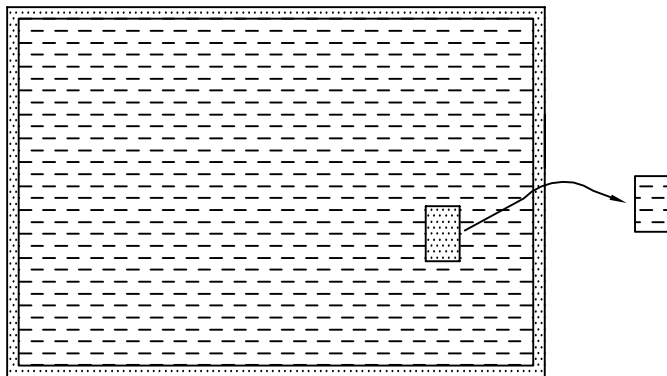

REMOVE FIBERGLASS OUTLINE ON EXTENSION  
WITH UTILITY KNIFE BEING CAREFUL NOT TO  
CUT FABRIC.

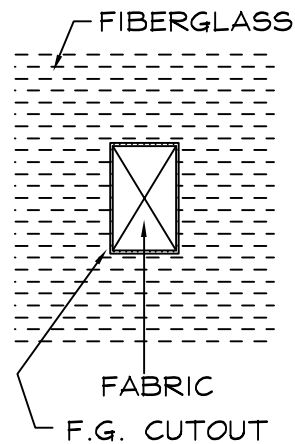

CUT "X" IN FABRIC. SPRAY  
FABRIC WITH ADHESIVE.  
PULL FABRIC THROUGH AND  
ADHERE TO BACK OF PANEL

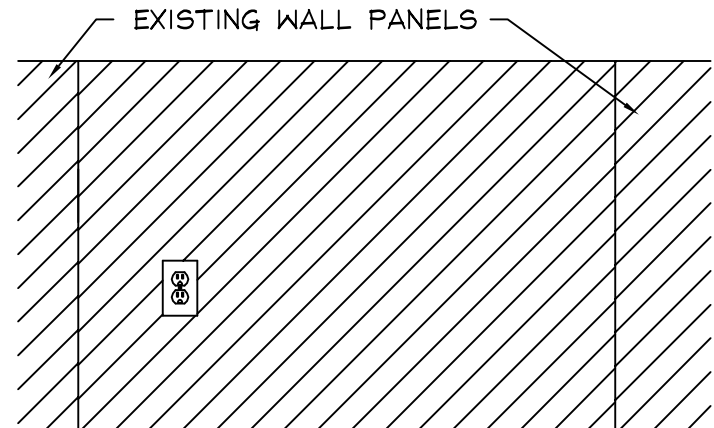

ATTACH PANEL TO THE WALL. PANEL SHOULD  
CLEAR EXTENSION. SCREW INTO PLACE LARGER  
OUTLET COVER THAN ORIGINAL AND RESTORE  
POWER TO THE OUTLET.