



THROUGH BOLTED OR WELDED

MODEL	BOLT/ ANCHOR SIZE (ØD) (UNC)	WELD LENGTH (Lw)	MAX. HORIZ. FORCE ORIENTATION 1 @ A=0°		MAX. HORIZ. FORCE ORIENTATION 1 @ A=30°		MAX. HORIZ. FORCE ORIENTATION 1 @ A=45°		MAX. HORIZ. FORCE ORIENTATION 1 @ A=60°		MAX. HORIZ. FORCE ORIENTATION 2 @ A=0°		MAX. HORIZ. FORCE ORIENTATION 2 @ A=30°		MAX. HORIZ. FORCE ORIENTATION 2 @ A=45°		MAX. HORIZ. FORCE ORIENTATION 2 @ A=60°	
			lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS
KSCA-AK-250	0.25	1.00	570	II	985	II	695	II	405	I	625	II	705	II	695	II	570	II
KSCA-AK-375	0.38	1.25	1,175	III	2,405	III	1,700	III	995	II	1,175	III	1,725	III	1,700	III	1,385	III
KSCA-AK-500	0.50	2.00	1,175	III	2,970	IV	2,970	IV	1,820	III	1,175	III	2,970	IV	2,970	IV	2,540	IV

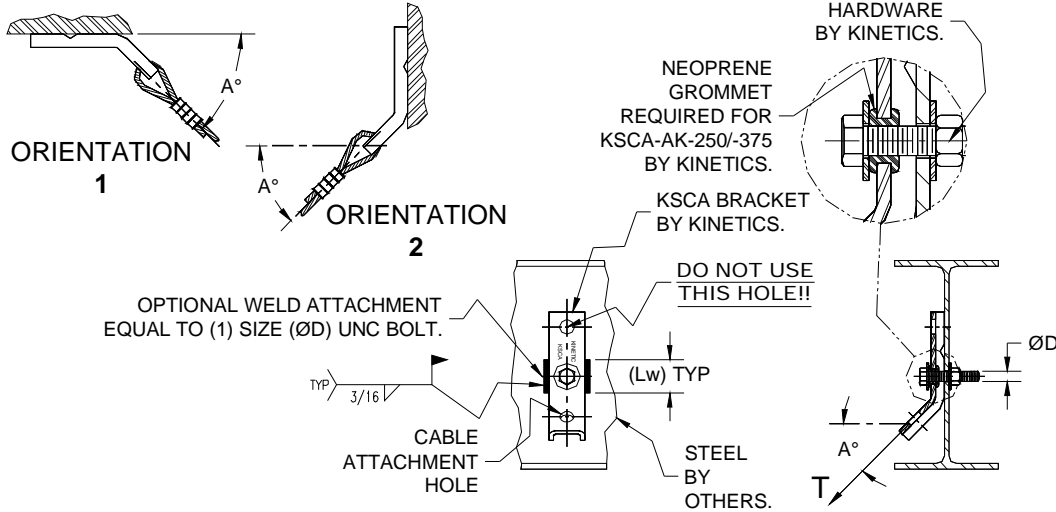

ANCHORED TO CONCRETE

MODEL	BOLT/ ANCHOR SIZE (ØD) (UNC)	MAX. HORIZ. FORCE ORIENTATION 1 @ A=0°		MAX. HORIZ. FORCE ORIENTATION 1 @ A=30°		MAX. HORIZ. FORCE ORIENTATION 1 @ A=45°		MAX. HORIZ. FORCE ORIENTATION 1 @ A=60°		MAX. HORIZ. FORCE ORIENTATION 2 @ A=0°		MAX. HORIZ. FORCE ORIENTATION 2 @ A=30°		MAX. HORIZ. FORCE ORIENTATION 2 @ A=45°		MAX. HORIZ. FORCE ORIENTATION 2 @ A=60°	
		lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS
KSCA-AK-250	0.25	200	-0-	415	I	255	I	140	-0-	215	-0-	240	-0-	255	I	240	-0-
KSCA-AK-375	0.38	435	I	990	II	560	II	300	I	450	I	520	II	560	II	570	II
KSCA-AK-500	0.50	665	II	1,620	III	865	II	455	I	670	II	785	II	865	II	935	II

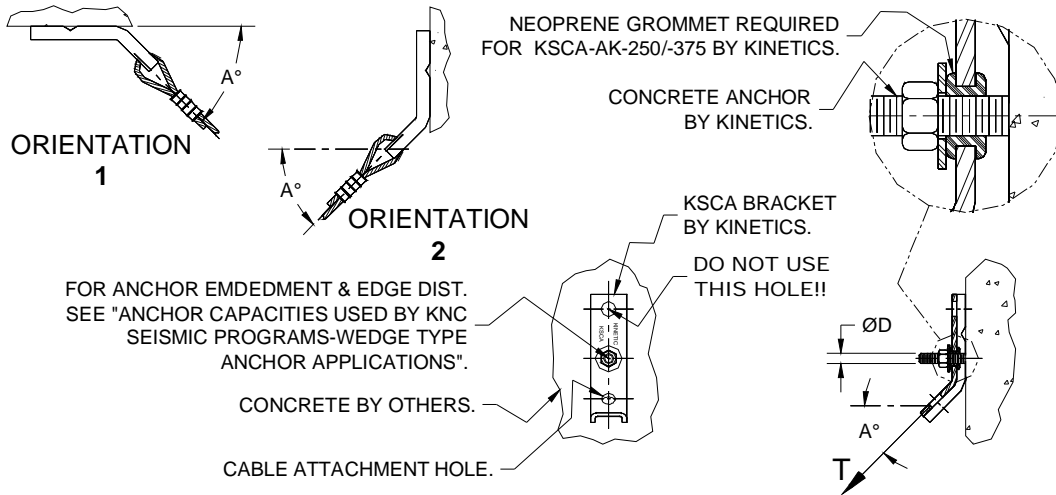

KSCA-AK CABLE ANCHORAGE HARDWARE KIT FOR KSCA BRACKETS

PAGE 1 OF 1 - DRAWING # S-90.385-2A & S-90.385-2B

RELEASE DATE: 5/21/04



DUBLIN, OHIO, USA • MISSISSAUGA, ONTARIO, CANADA

Toll Free (USA only): 800-959-1229
 International: 614-889-0480
 Fax: 614-889-0540
 World Wide Web: www.kineticsnoise.com
 Email: sales@kineticsnoise.com

DOCUMENT:

P7.4.1

