


NPS NEOPRENE PAD

I-P UNITS (INCHES AND POUNDS)

TYPE	A	B	C
NPS-2-45/65	2.00	2.00	0.22
NPS-3-45/65	3.00	3.00	0.22
NPS-4-45/65	4.00	4.00	0.22
NPS-6-45/65	6.00	6.00	0.22
NPS-9-45/65	9.00	9.00	0.22
NPS-18-45/65	18.00	18.00	0.22

STANDARD RATINGS

TYPE	MAX. DEFL.	OP. HT.	CAPACITY RANGE
NPS-2-45	0.05	0.17	100 - 240
NPS-2-65	0.04	0.18	180 - 480
NPS-3-45	0.05	0.17	225 - 540
NPS-3-65	0.04	0.18	405 - 1080
NPS-4-45	0.05	0.17	400 - 960
NPS-4-65	0.04	0.18	720 - 1920
NPS-6-45	0.05	0.17	900 - 2160
NPS-6-65	0.04	0.18	1620 - 4320
NPS-9-45	0.05	0.17	2025 - 4860
NPS-9-65	0.04	0.18	3645 - 9720
NPS-18-45	0.05	0.17	8100 - 19440
NPS-18-65	0.04	0.18	14580 - 38880

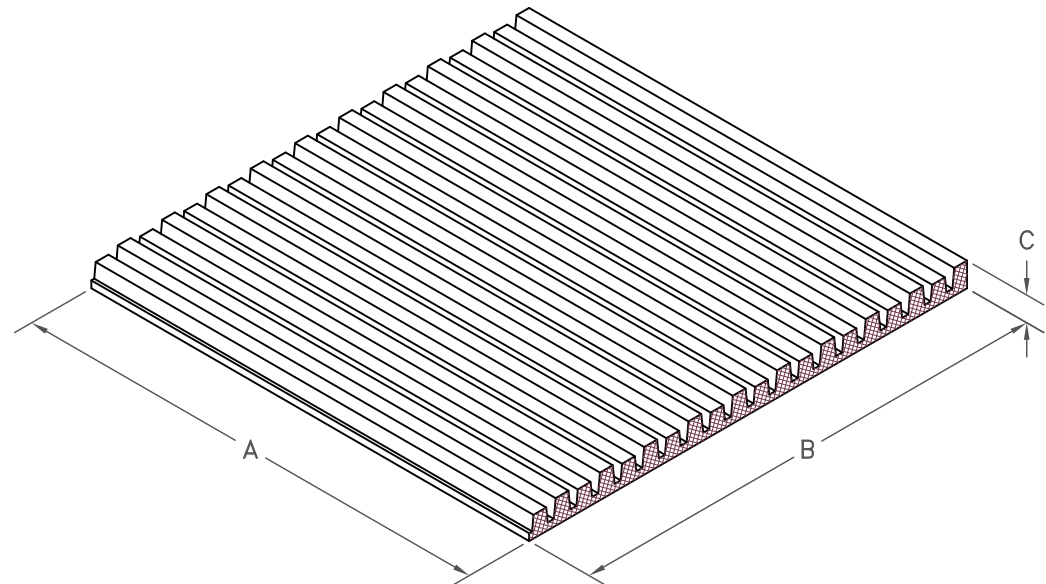

NOTES:

- NPS-45 IS 45 DUROMETER
- NPS-65 IS 65 DUROMETER



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
**NPS
 PAD**

By: **JMJ**
 Date: **05/16/03**
 Revised: **02/24/09 / BB**

Drawing No:
S-02.02-11