


NPD NEOPRENE PAD

I-P UNITS (INCHES AND POUNDS)

TYPE	A	B	C
NPD-2-45/65	2.00	2.00	0.38
NPD-3-45/65	3.00	3.00	0.38
NPD-4-45/65	4.00	4.00	0.38
NPD-6-45/65	6.00	6.00	0.38
NPD-9-45/65	9.00	9.00	0.38
NPD-18-45/65	18.00	18.00	0.38

STANDARD RATINGS

TYPE	MAX. DEFL.	OP. HT.	CAPACITY RANGE
NPD-2-45	0.09	0.29	100 - 240
NPD-2-65	0.08	0.30	180 - 480
NPD-3-45	0.09	0.29	225 - 540
NPD-3-65	0.08	0.30	405 - 1080
NPD-4-45	0.09	0.29	400 - 960
NPD-4-65	0.08	0.30	720 - 1920
NPD-6-45	0.09	0.29	900 - 2160
NPD-6-65	0.08	0.30	1620 - 4320
NPD-9-45	0.09	0.29	2025 - 4860
NPD-9-65	0.08	0.30	3645 - 9720
NPD-18-45	0.09	0.29	8100 - 19440
NPD-18-65	0.08	0.30	14580 - 38880

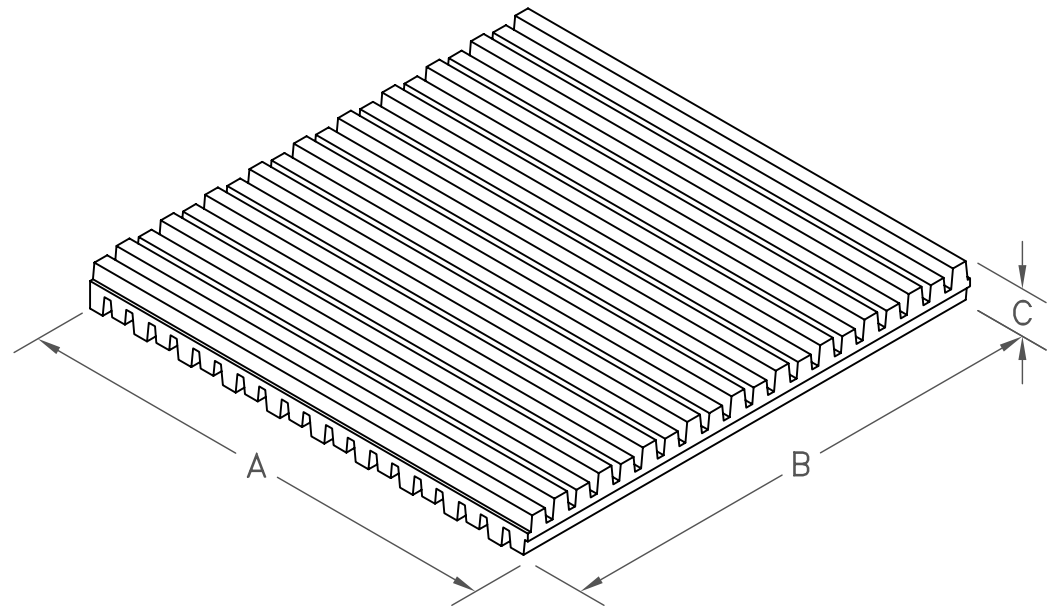

NOTES:

- NPD-45 IS 45 DUROMETER
- NPD-65 IS 65 DUROMETER



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
 NPD
 PAD

By: JMJ
 Date: 05/16/03
 Revised: 10/27/06 /BK

Drawing No:
 S-02.02-12