


SH 1" DEFLECTION ISOLATION HANGERS

IP UNITS (INCHES AND POUNDS)

TYPE	H	W	A	DMAX
1-2200/3500	9.50	5.00	4.75	1.00

STANDARD RATINGS				SPRING COIL			
TYPE	SIZE	LOAD	DEFL.	COLOR		FREE	
				OUTER	INNER	HT.	O.D.
SH	1-2200	2200	1.00	ORANGE	GRAY	4.20	3.00
SH	1-2465	2465	1.00	BLUE		4.20	3.00
SH	1-2865	2865	1.00	BLUE	GRAY	4.20	3.00
SH	1-3500	3500	1.00	BLUE	BROWN	4.20	3.00

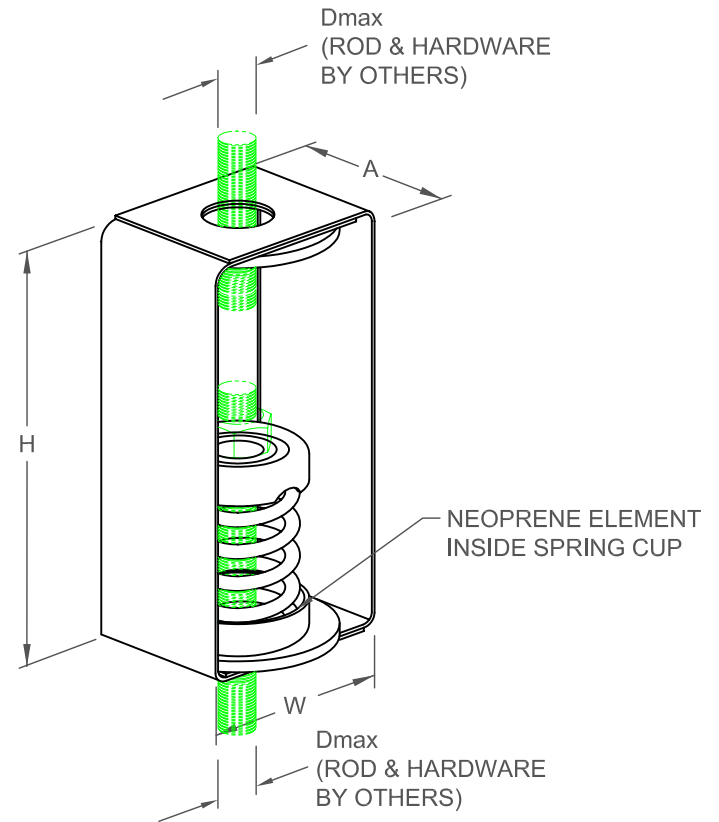

SPECIFICATIONS:

- SPRING ELEMENTS AND BRACKETS ARE POWDER COATED.
- LOAD PLATES ARE BRIGHT ZINC PLATED.
- ISOLATION HANGERS HAVE A TYPICAL OVERLOAD OF 50%.
- ISOLATION HANGERS HAVE A MINIMUM Kx/Ky RATIO OF 1.0.
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING.
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING.
- HANGER INCORPORATES "NO SHORT" STEP CAP.



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
SH-1
2200/3500

By: **BB**
 Date: **12/07/05**
 Revised: **/**

Drawing No:
S-03.36-14