
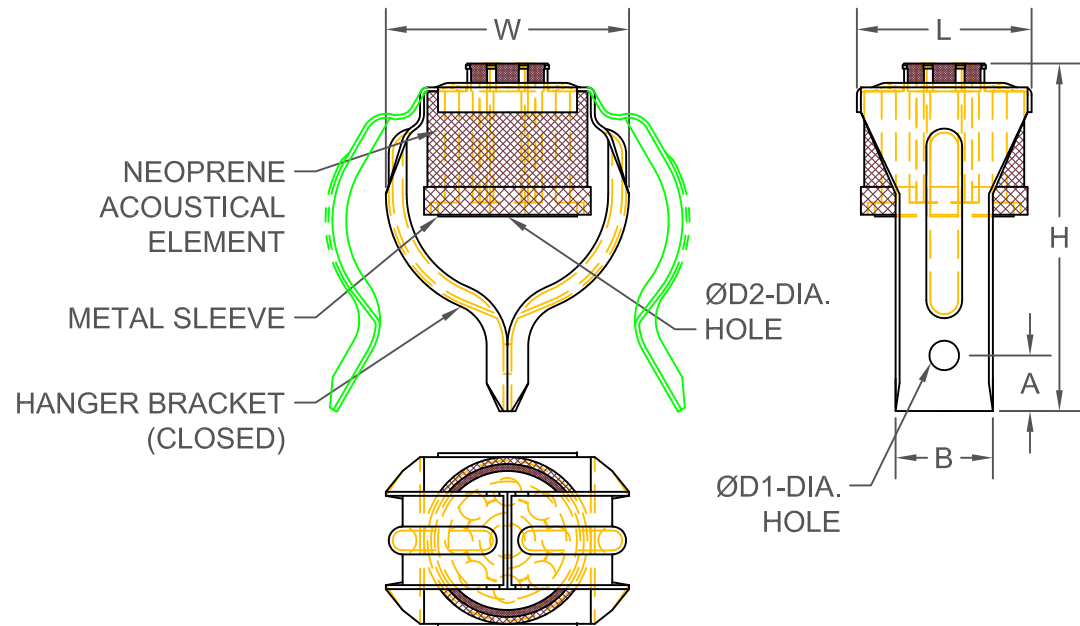



ISOGRID 40/160							
SI UNITS (mm AND kg)							
TYPE	A	B	D1	D2	H	L	W
ISOGRID-40/160	13	22	7	8	79	40	56

STANDARD RATINGS					
TYPE	SIZE	IDENTIFICATION COLOR	ISOLATOR		RECOMMENDED LAYERS OF DRYWALL
			LOAD	DEFL.	
ISOGRID	40	WHITE	19	5	1
ISOGRID	105	GREEN	48	5	2
ISOGRID	160	RED	72	5	3

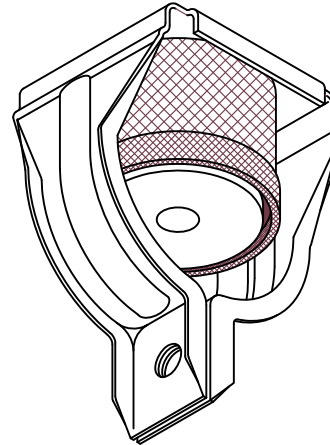

**SPECIFICATIONS:**

- HANGER BRACKETS ARE BRIGHT ZINC PLATED.
- ISOLATION HANGERS HAVE A TYPICAL OVERLOAD OF 50%.
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.



KINETICS NOISE CONTROL, INC  
 6300 IRELAN PL,  
 DUBLIN, OH 43017 USA  
 Ph: 614 889-0480, Fax: 614 889-0540  
 www.kineticsnoise.com

Model:  
**ISOGRID-40/160**

By: BB  
 Date: 01/12/11  
 Revised: /

Drawing No:  
**S-03.40-14 METRIC**