

ICC 25 mm DEFLECTION ISOLATION HANGERS


SI UNITS (mm AND kg)

TYPE	H	W	A	DMAX	J	K
24/210	187	94	57	10	40	17

STANDARD RATINGS				SPRING COIL		
TYPE	SIZE	LOAD	DEFL.	COLOR	FREE HT.	O.D.
ICC	24	11	26	BLUE	81	44
ICC	37	17	25	WHITE	81	44
ICC	50	23	25	GREEN	81	44
ICC	75	34	25	BLACK	81	44
ICC	100	45	25	GRAY	81	44
ICC	150	68	25	RED	81	44
ICC	210	95	26	BROWN	81	44

SPECIFICATIONS:

- SPRING ELEMENTS AND BRACKETS ARE POWDER COATED.
- LOAD PLATES AND ALL HARDWARE ARE BRIGHT ZINC PLATED.
- ISOLATION HANGERS HAVE A TYPICAL OVERLOAD OF 50%.
- ISOLATION HANGERS HAVE A MINIMUM Kx/Ky RATIO OF 1.0.
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING.
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING.
- ISOLATION HANGERS HAVE A NEOPRENE BOTTOM SPRING CUP.

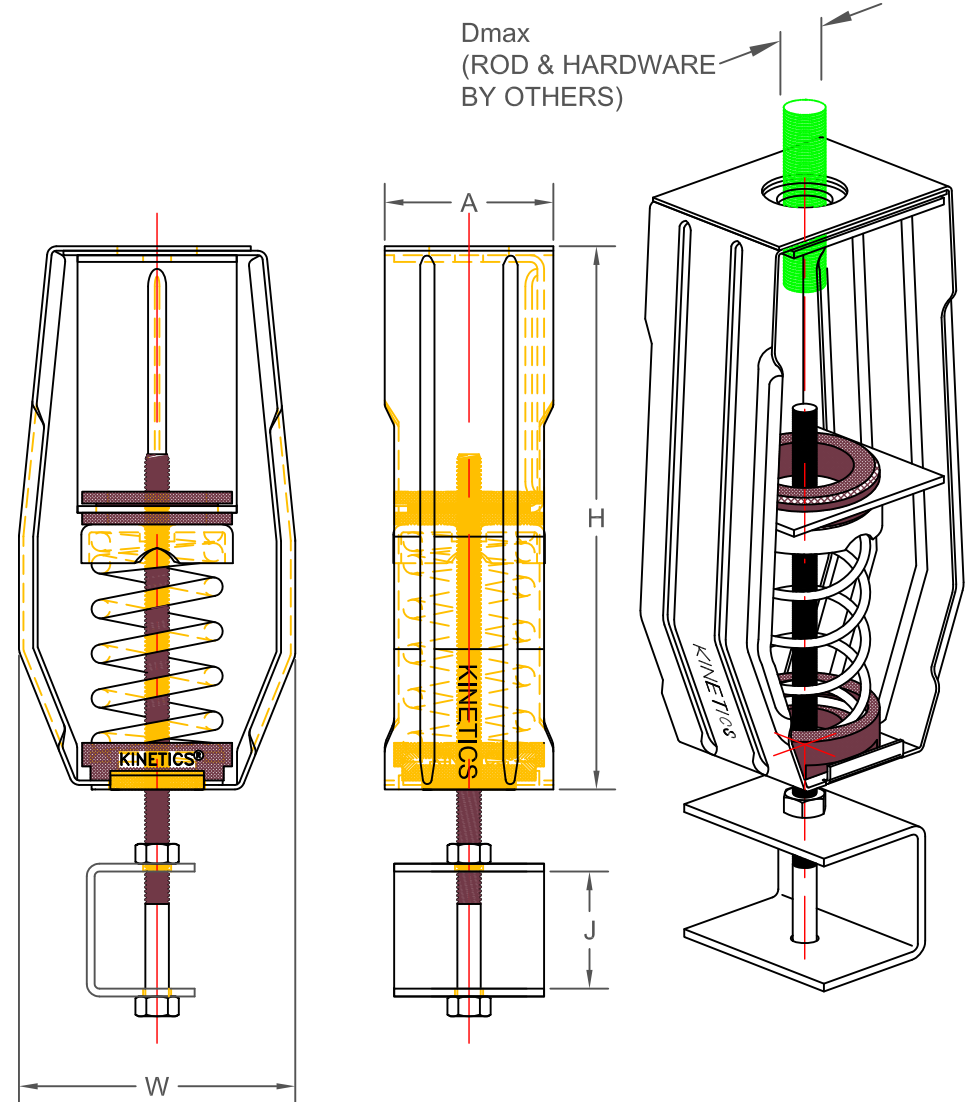

KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
ICC-24/210

By: **BB**
 Date: **02/05/10**
 Revised: **01/12/11 /BB**

Drawing No:
S-03.50-12
METRIC