
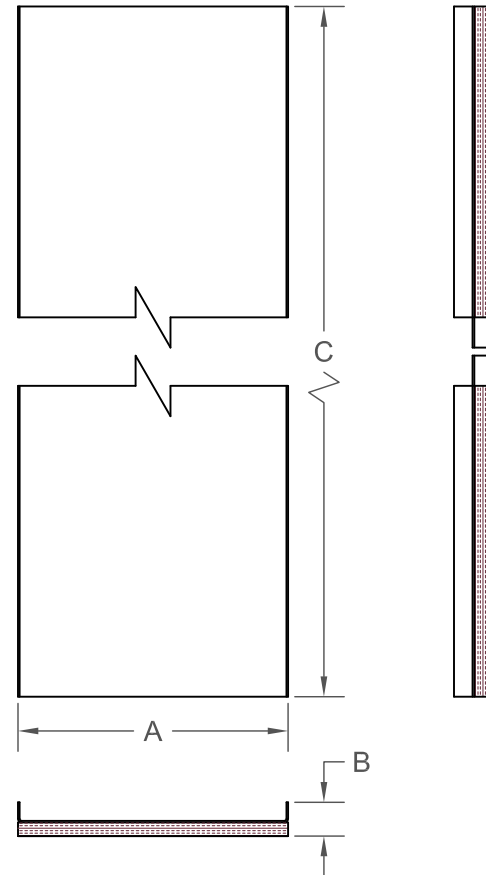


PC-10 MASONRY UNDERLAYMENT

SI UNITS (mm AND kg)

TYPE	DIMENSION		
	A	B	C
PC-10-6	152	32	1219
PC-10-8	203	32	1219
PC-10-10	254	32	1219
PC-10-12	305	32	1219

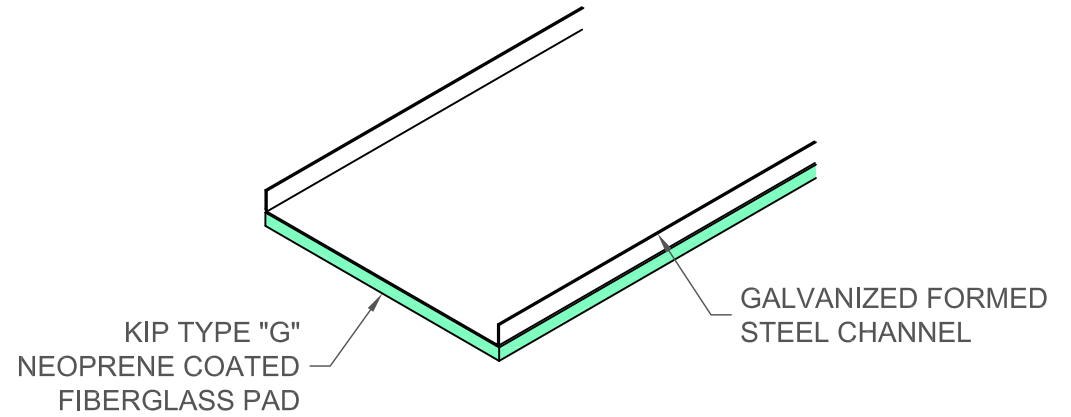

SPECIFICATIONS:

- ISOLATION MEDIUM FOR USE BENEATH WALL PARTITIONS.
- CHANNEL IS GALVANIZED STEEL.
- ISOLATION ELEMENT IS KIP TYPE "G" ELASTOMERICALLY COATED FIBERGLASS.
- RATED DESIGN LOAD IS 1.05 KILOGRAMS PER SQUARE CENTIMETER.



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
PC-10

By: **BB**
 Date: **10/27/11**
 Revised: **/**

Drawing No:
S-11.17-01
METRIC