
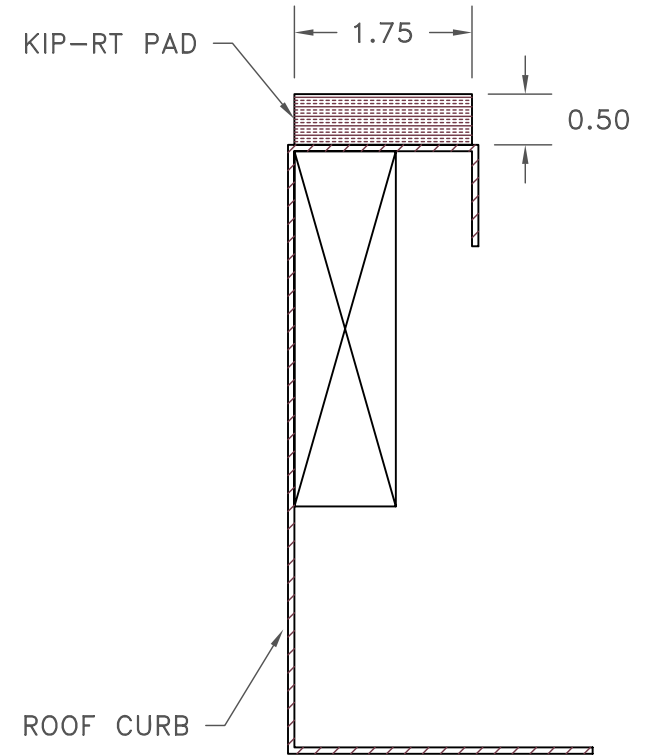


**NOTE:**

ENLARGED PORTION OF CURVE INDICATES LOAD RANGE FOR STEADY STATE LOADS.  
 FOR IMPACT OR SHOCK LOADS, REDUCE THIS LOADING BY 50%.

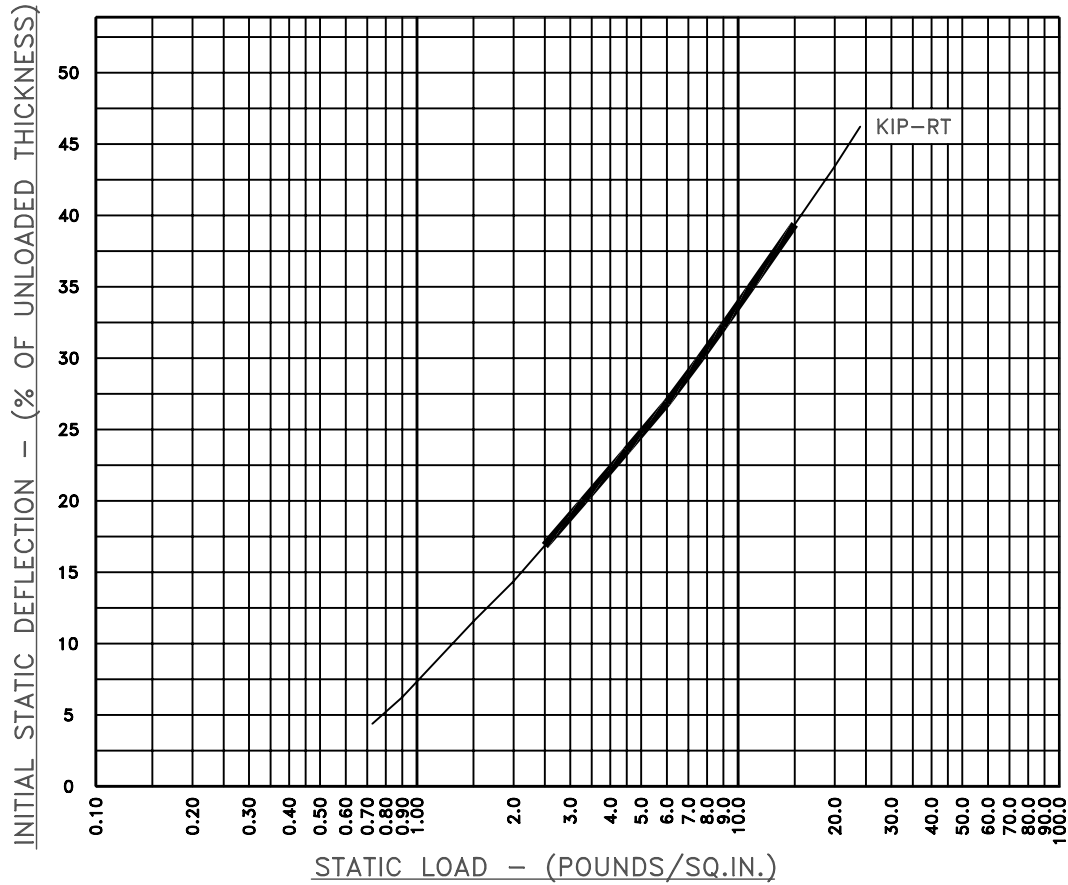

CURB CROSS SECTION

**\* NOTE:**

FIBER GLASS PAD IS SUPPLIED IN 48 INCH LONG LENGTHS.  
 FIELD CUT TO FIT TOP OF CURB, AND ADHERE FIBER GLASS  
 PAD TO CURB WITH A MASTIC ADHESIVE. (I.E., "LIQUID NAILS"  
 OR SIMILAR). EXPOSED CUT EDGES OF FIBER GLASS ARE TO  
 BE SEALED WITH A HIGH QUALITY SILICONE CAULK. ADHESIVE  
 AND CAULK TO BE PROVIDED BY OTHERS.



TITLE  
 KIP-RT ROOFTOP  
 FIBERGLASS PAD

LAST DATE  
 REVISED  
 03/01/04

REVISED BY  
 BB

DRAWING NO.  
 S-21.00-5A