


NOTES:
 CONCRETE HOLE DIAMETER TO BE 0.75"
 (19.1mm)
 CONCRETE WALL THICKNESS TO BE
 1.00" (25.4mm) TO 2.00"(50.8mm)

MODEL	ALLOWABLE TENSION Lbs. (Kn)	ALLOWABLE SHEAR Lbs. (Kn)
KHBA-375	889.5 (3.95)	777.25 (3.45)

MODEL	VOL. OF ADHESIVE CARTRIDGE (FL. OZ.)	QTY. OF ANCHOR INSTALLATIONS
KA7-05	5	3


ADHESIVE CURING TIMES		
TEMPERATURE (F°/C°)	WORKING TIME	FULL CURE TIME
100°/38°	5 MIN	25 MIN
80°/27°	5.5 MIN	30 MIN
60°/16°	7 MIN	35 MIN
40°/4°	15 MIN	75 MIN
20°/-7°	35 MIN	6 HRS
0°/-18°	4 HRS	24 HRS

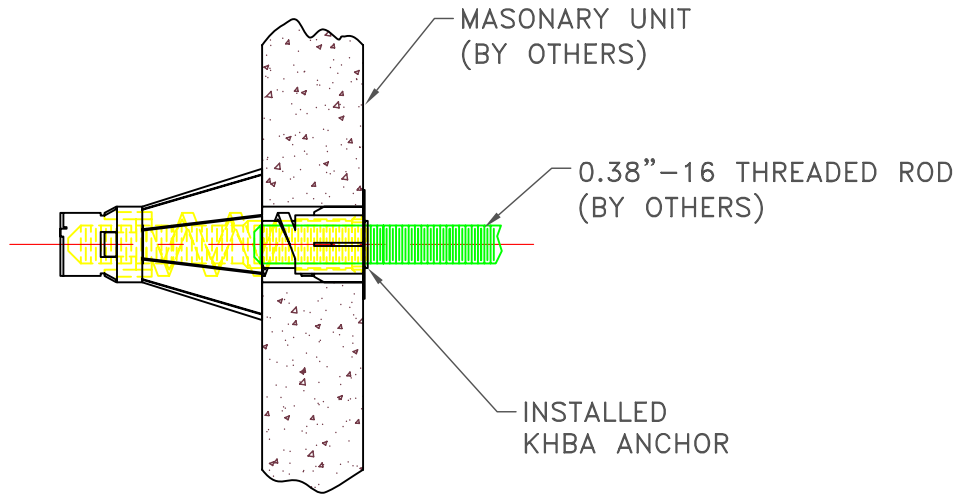

NOTES:

IMPORTANT CARTRIDGE IS REUSABLE UNTIL EMPTY. EXTRA NOZZLES REQUIRED ONCE WORKING TIME OF ADHESIVE HAS BEEN EXCEEDED.

INSTALLATION INSTRUCTIONS AVAILABLE ON KNC DRAWING NUMBER INS-51.13-1A

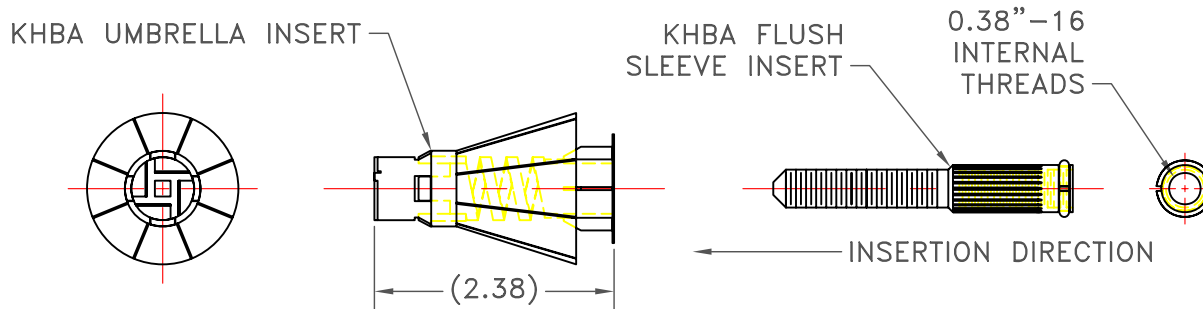

TITLE
 KHBA-375 HOLLOW
 BLOCK ANCHOR

LAST DATE
 REVISED
 9-25-07

REVISED BY
 BB

DRAWING NO.
 S-51.13-1A