

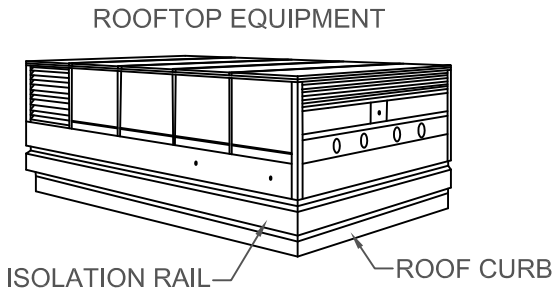


**SPECIFICATIONS**

- SPRING ISOLATORS ARE COMPUTER SELECTED AND LOCATED TO PROVIDE A NOMINAL 2.00 INCH (50 mm) STATIC DEFLECTION.
- SPRING ISOLATORS HAVE A MINIMUM  $K_x/K_y$  OF 1.0.
- SPRING ISOLATORS ARE SAFE AT SOLID LOADING.
- SPRING ISOLATORS ARE POWDER COATED.
- ALL UNITS SUPPLIED WITH A TROUBLESHOOTING PACKAGE FOR LEVELING EQUIPMENT, IF REQUIRED, DURING INSTALLATION.

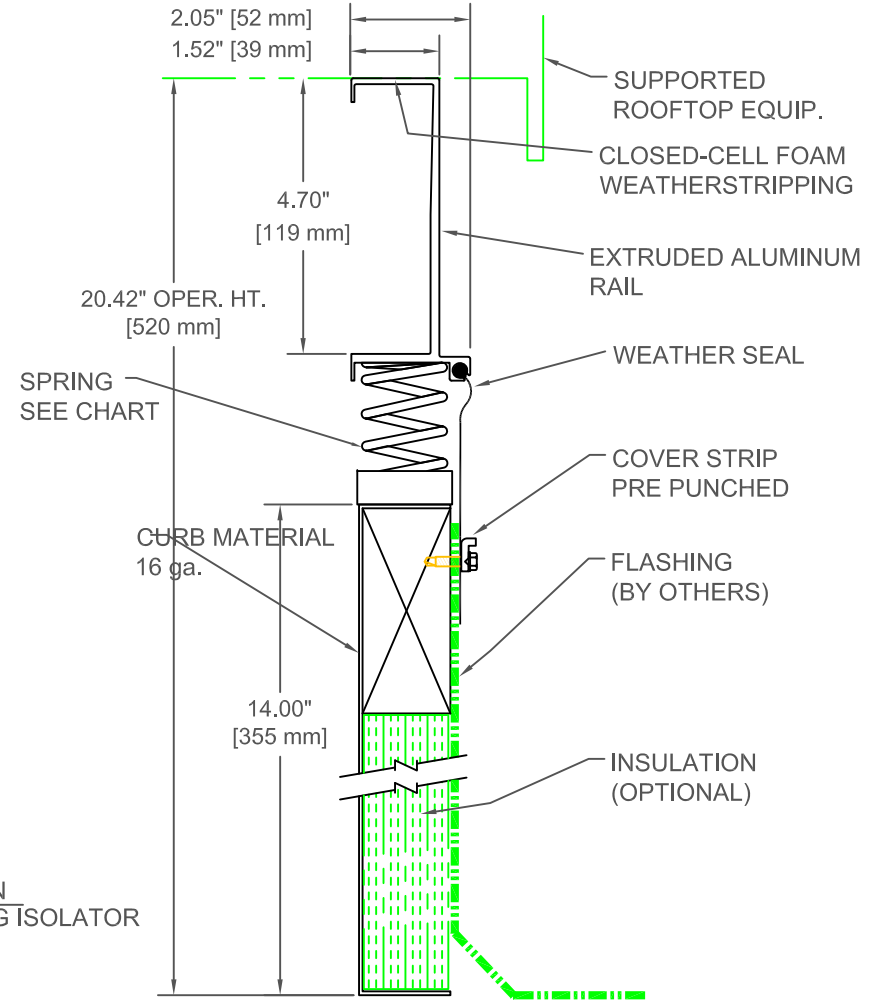

RATED LOAD LB/KG	RATED DEFL. IN/mm	SPRING FR. HT. IN/mm	SPRING O. D. IN/mm	SPRING COLOR CODE
30/14	2.00/50	3.75/95	1.46/37	GRAY
65/30	2.00/50	3.75/95	1.46/37	BLUE
120/55	2.00/50	3.75/95	1.46/37	GREEN
205/93	2.00/50	3.75/95	1.46/37	BLACK

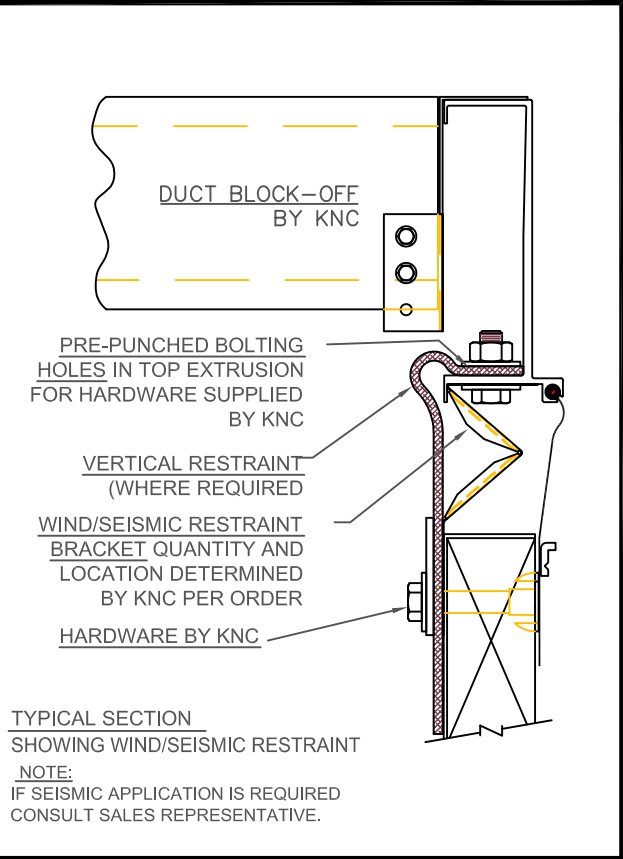

TITLE **KSCR-2 ISOLATION RAIL W/ HORIZONTAL AND VERTICAL RESTRAINTS**

LAST DATE REVISED  
**03/01/10**

REVISED BY  
**DCB**

DRAWING NO.  
**S-88.600**

S-88