


# KSCC-KSCCZ END LOOP

MODEL	CABLE SIZE	A	B (MIN)	C	T
-----	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in-lb (N·m)
KSCC-4	1/4 (6.4)	7.00 (178)	0.75 (19)	3.19 (81)	180 (20)
KSCC-6	3/8 (9.5)	9.50 (241)	0.88 (22)	3.94 (100)	360 (41)
KSCC-8	1/2 (12.7)	15.25 (387)	1.06 (27)	4.69 (119)	540 (61)

**NOTE:**

THIS INSTALLATION IS NOT RECOMMENDED FOR WEIGHT BEARING OR HIGH CYCLE LOAD APPLICATIONS.

**SADDLES OF WIRE ROPE CLIPS MUST BEAR AGAINST LIVE CABLE STRAND!**

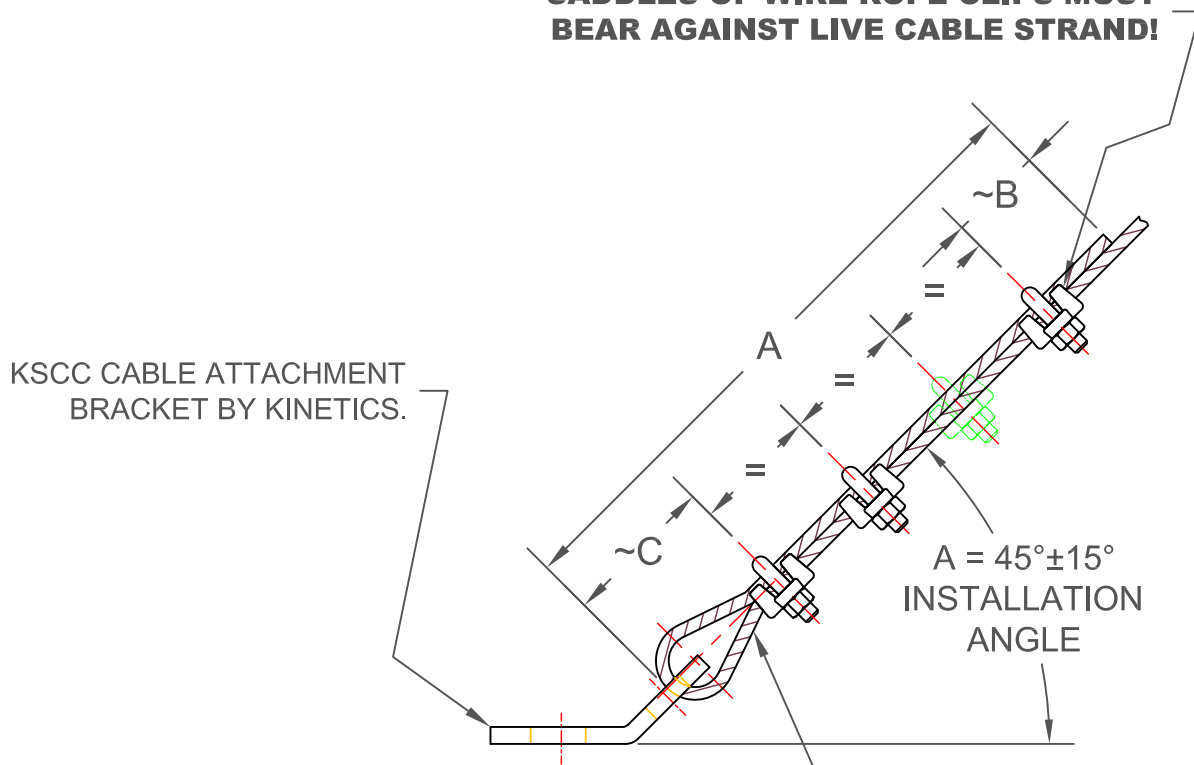

1/8"(3.2 mm) - 3/8"(9.5 mm) DIA CABLE,  
THREE (3) WIRE ROPE CLIPS REQ'D.  
1/2"(12.7 mm) DIA CABLE, FOUR (4) WIRE ROPE CLIPS REQ'D.,  
BY KINETICS. TIGHTEN NUTS TO TORQUE = T

THIS COMPONENT IS SUITABLE FOR SEISMIC APPLICATIONS SUBJECT TO THE QUALIFICATIONS INDICATED ON THIS DRAWING



LAST DATE  
REVISED  
10/05/11

DRAWN BY  
DCB

DRAWING NO.  
S-90.384-11B