
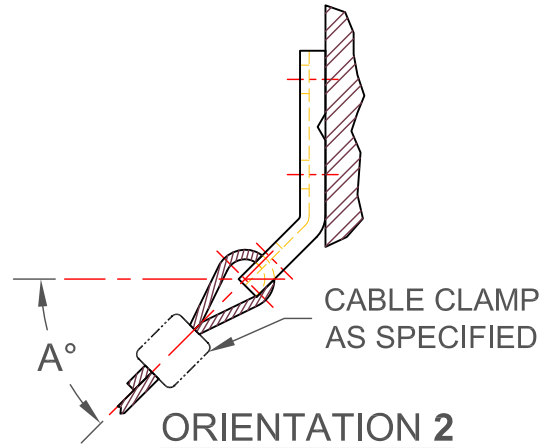


KSCA ATTACHMENT TO STEEL

NOTE:
FOR ATTACHMENT HARDWARE CAPACITIES
SEE DRAWING S-90.405-2E.

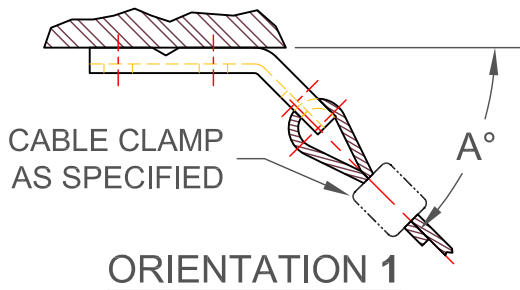

NEOPRENE GROMMET REQUIRED FOR KSCA-AK-250/-375 BY KINETICS.

HARDWARE BY KINETICS.

OPTIONAL WELD ATTACHMENT EQUAL TO (1) SIZE (\varnothing D) UNC BOLT.

KSCA BRACKET BY KINETICS.

DO NOT USE THIS HOLE!!

2 PLACES
 $3/16$
(5 mm)

$1 \frac{1}{2}$ " TYP.

CABLE ATTACHMENT HOLE

STEEL BY OTHERS.

$A = 45^\circ \pm 15^\circ$
INSTALLATION ANGLE

T

THIS COMPONENT IS SUITABLE FOR SEISMIC APPLICATIONS SUBJECT TO THE QUALIFICATIONS INDICATED ON THIS DRAWING



LAST DATE REVISED
10/05/11

DRAWN BY
DCB

DRAWING NO.
S-90.385-2A