
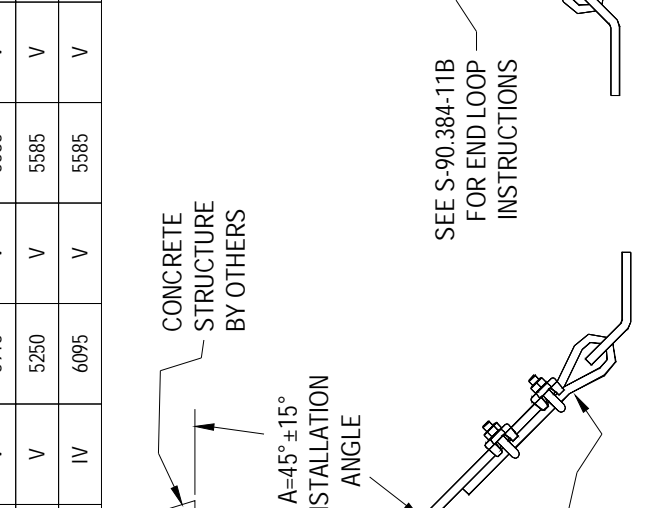


MODEL	* MAX. CABLE TENSION		* MAX. HORIZONTAL CABLE FORCE @ A=0°		* MAX. HORIZONTAL CABLE FORCE @ A=30°		* MAX. HORIZONTAL CABLE FORCE @ A=45°		* MAX. HORIZONTAL CABLE FORCE @ A=60°	
	in.	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	lbs.	CLASS	ORIENTATION
KSCC4-250B	1/4	2960	IV	2960	IV	2560	IV	2090	IV	1 or 2
	3/8	5915	V	5915	V	5020	V	5585	V	1
KSCC4-375B	3/8	5915	V	5915	V	5915	V	5585	V	2
	1/2	8500	V	6250	V	5250	V	5585	V	1
KSCC4-500B	1/2	8500	V	3375	IV	6095	V	5585	V	2

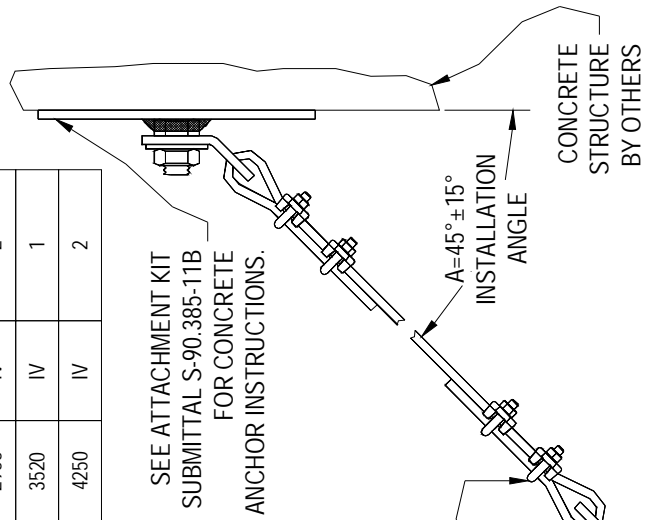

* FOR CCA-4 BRACKET BOLTED TO CONCRETE.

KSCC4 U-BOLT CLIP BULK CABLE RESTRAINT KIT (CCA-4 – CCA)

PAGE 1 OF 1 - DRAWING # S-90.384-12A

RELEASE DATE 5/21/04



Toll Free (USA only): 800-959-1229
 International: 614-889-0480
 Fax: 614-889-0540
 World Wide Web: www.kineticsnoise.com
 Email: sales@kineticsnoise.com

DOCUMENT:

P7.3.7

