


NPD NEOPRENE PAD

S-I UNITS (MM AND KG)

TYPE	A	B	C
NPD-2-45/65	51	51	10
NPD-3-45/65	76	76	10
NPD-4-45/65	102	102	10
NPD-6-45/65	152	152	10
NPD-9-45/65	229	229	10
NPD-18-45/65	457	457	10

STANDARD RATINGS

TYPE	MAX. DEFL.	OP. HT.	CAPACITY RANGE
NPD-2-45	2.3	7.2	45 - 109
NPD-2-65	2.0	7.5	82 - 218
NPD-3-45	2.3	7.2	102 - 245
NPD-3-65	2.0	7.5	184 - 490
NPD-4-45	2.3	7.2	181 - 435
NPD-4-65	2.0	7.5	327 - 871
NPD-6-45	2.3	7.2	408 - 980
NPD-6-65	2.0	7.5	735 - 1960
NPD-9-45	2.3	7.2	919 - 2204
NPD-9-65	2.0	7.5	1653 - 4409
NPD-18-45	2.3	7.2	3674 - 8818
NPD-18-65	2.0	7.5	6613 - 17636

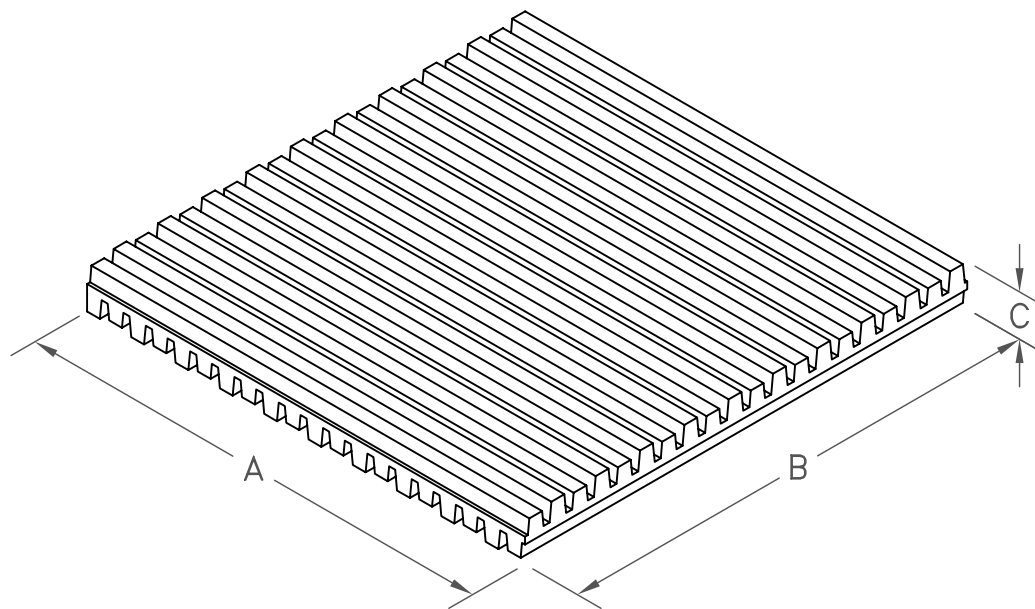

NOTES:

- NPD-45 IS 45 DUROMETER
- NPD-65 IS 65 DUROMETER



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
**NPD
 PAD**

By: **JMJ**
 Date: **05/16/03**
 Revised: **10/27/06 /BK**

Drawing No:
**S-02.02-12
 METRIC**