


# RH-D HANGER

S-I UNITS (mm AND kg)

TYPE	L	W	A	Dmax	H
RH-160D/550D	150	80	57	16	47

## STANDARD RATINGS

TYPE	SIZE	RATED		ISOLATOR COLOR
		LOAD	DEFL.	
RH	160D	73	10	RED
RH	350D	159	10	GREEN
RH	550D	249	10	WHITE

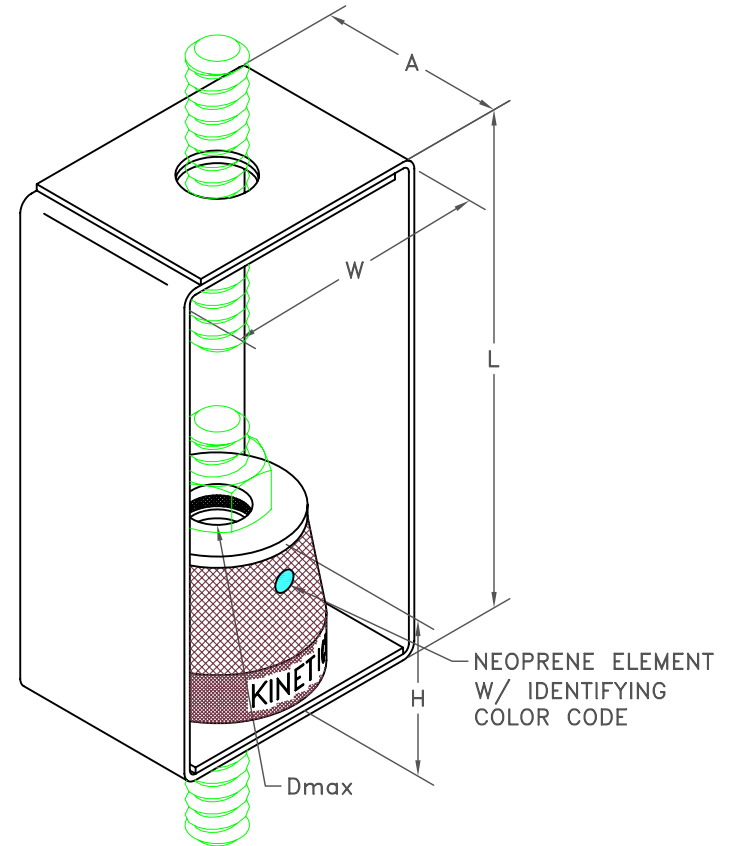

### SPECIFICATIONS:

- HANGER BRACKETS AND LOAD PLATES ARE BRIGHT ZINC PLATED.
- RATED LOADS ARE MAXIMUM CONTINUOUS OPERATING LOADS.
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE.
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING.



KINETICS NOISE CONTROL, INC  
 6300 IRELAN PL,  
 DUBLIN, OH 43017 USA  
 Ph: 614 889-0480, Fax: 614 889-0540  
 www.kineticsnoise.com

Model:  
 RH  
 160D/550D

By: BB  
 Date: 12/07/05  
 Revised: /

Drawing No:  
 S-03.39-13  
 METRIC